



EUROKARTUSCHEN

Data sheet for printing pictures for 500 g grease cartridges

Type of printing: Silk screen printing
Colours: exclusively covering colours
Emulsion of film: emulsion of film must be legible
All-around print: print with or without convergence possible

Data carrier: E-mail with attachment, CD-ROM, USB-Stick



Usable formats: PC-Windows:
- Adobe Acrobat (.pdf, print optimized, without password protection)
- Corel Draw 17.0 (.cdr)
- CS6: Illustrator (.ai), InDesign (.indd), Photoshop (.psd)



Important: no JPEG data, but always vector EPS data!


All colours must be separable and set up as original colours in Pantone, HKS or RAL. Positioned pictures must be set up in a resolution of 300 dpi. Pictures and scripts must be accompanied with.

Font size: Minimum font size positive: not below 7 points 1234567890
Minimum font size negative: not below 8 points semi bold 1234567890


Line strength: min. 0,4 points 


Grid constructions: Minimum grid 6-8 % 
Maximum grid 60 % 

process induced growth point 20-25 % 

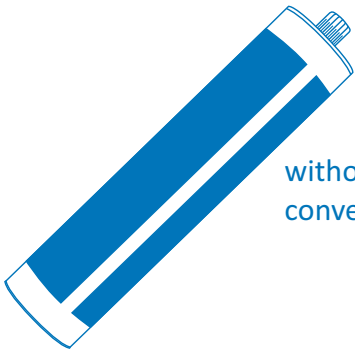


without
convergence

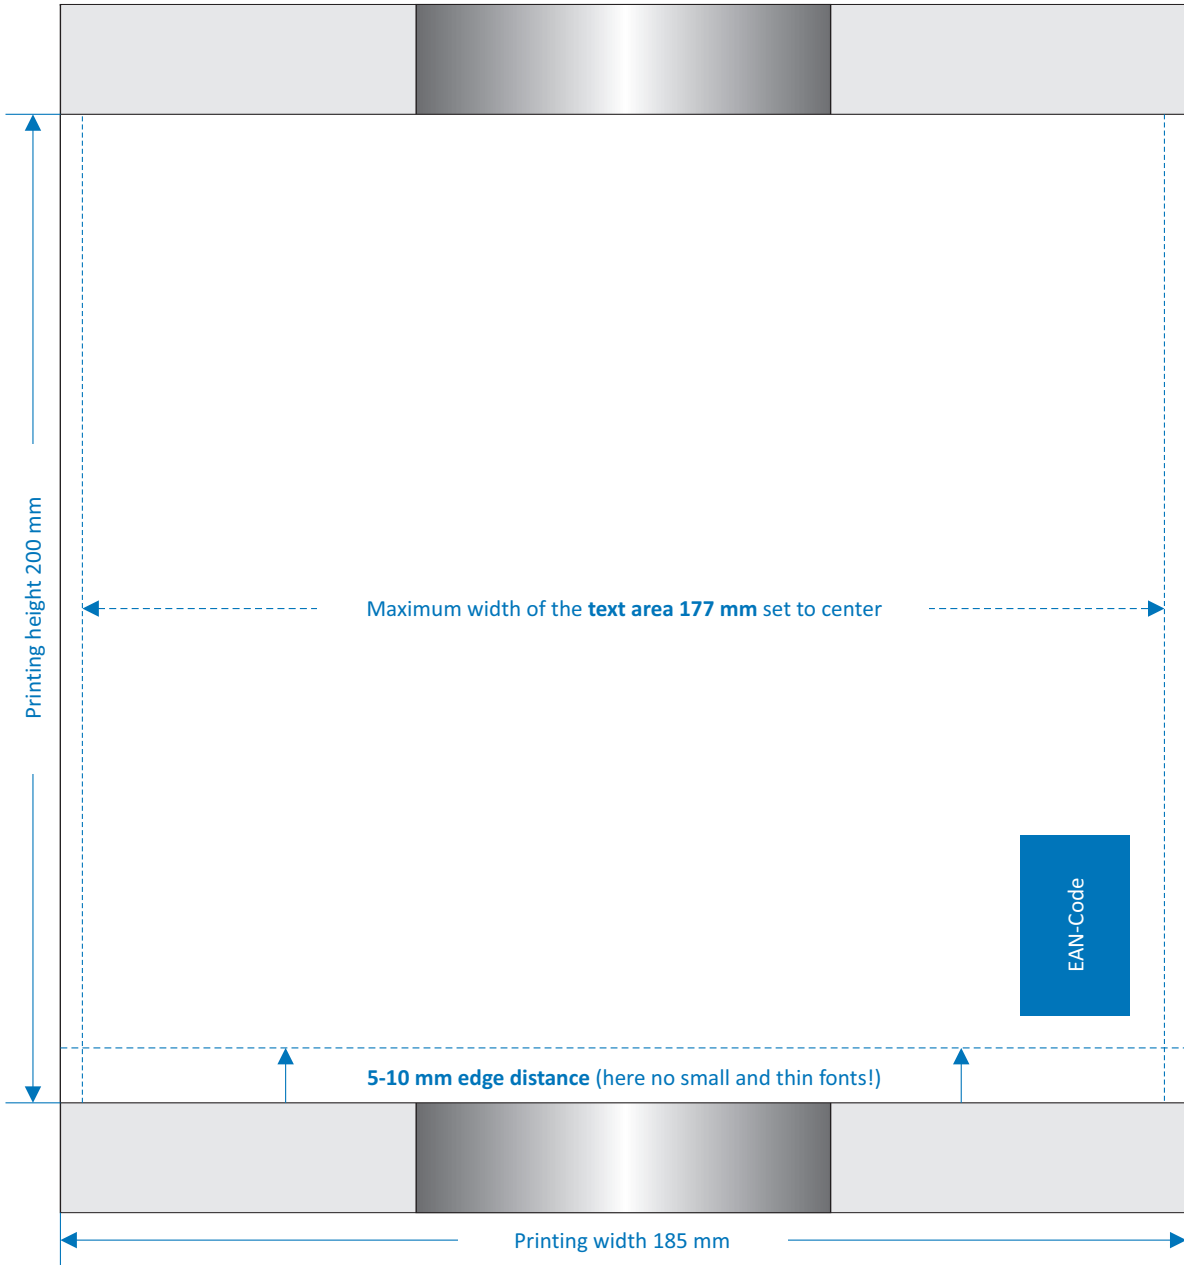

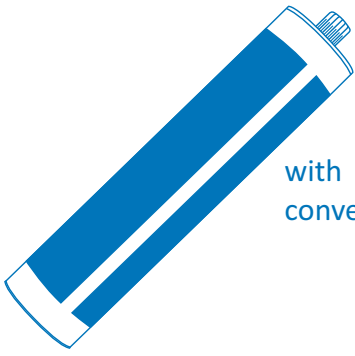

with convergence

